

PRODUCT DATA SHEET 10 SERIES



web: <https://stairnosingaustralia.com.au>

Contact : Daphne 0422 803 365

email: daphne@stairnosingaustralia.com.au


STAIRNOSING 10 series-stair nosing suitable for all surfaces

This stair nosing is suitable for all hard and soft surfaces. It is installed on ceramics, concrete, porcelain, carpet and terrazzo. It is also often fitted on surfaces that require a larger riser. Steps that may be chipped or cracked require a stair nosing that has a larger riser than 10 mm

This stair nosing is also popular where steps are bull-nosed. The nosing curves and returns to the face of the riser, thus eliminating any part hanging over the edge. Often also used on carpeted surfaces, such as broadloom and carpet tiles.


SPECIFICATIONS

PRODUCT	10 series
BASE MATERIAL	Alloy: 6060, Temper: T5
FINISH	Clear Anodised – 25Um/Anodised Clear, Black or Anodised Sovereign Gold
TREAD WIDTH	85 mm
FRONT DEPTH	35 mm
TREAD THICKNESS	4.8mm
INSERT TYPE	Carborundum - Epoxy - Santoprene - Aluminum ripple trim-Mineral PVC
PRODUCT WARRANTY	2 Years (As per Stair Nosing Perth's standard warranty conditions)
INSERT SLIP RATING	2-20 years. Please reference Defects Warranty and Product and Installation documents.)
CODE COMPLIANCE	P4 classification for PVC and P5 classification (Highest available) AS1428.1-2009 Check floor finish colour for luminance contrast requirements and LRV [Light Reflective Values]
FIXING METHOD	Screw fixed/or adhesive
APPLICATION	Surface mounted on hard and soft floor finishes – Concrete, Timber, porcelain, ceramics, terrazzo, carpet, carpet tiles




TYPICAL INSTALLATION

Screw fixed or use Soudal HI-Tack Adhesive

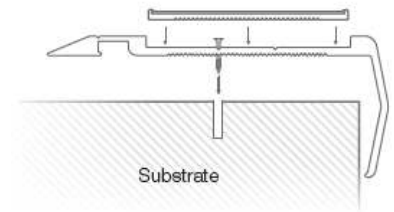


PROFILE

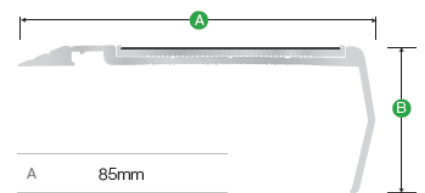


* Insert measures 54mm wide

Read more...

Inserts for 10 series

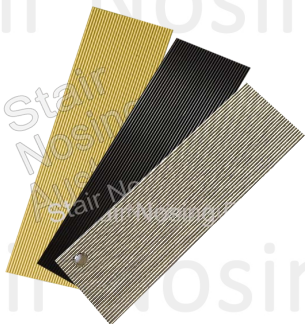


710 Anodised ripple trim

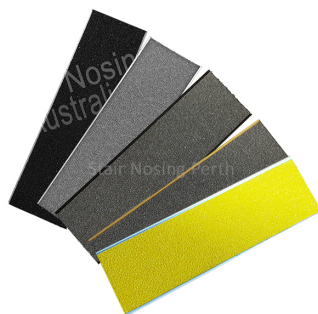

410 Carborundum



110 Epoxy carbide

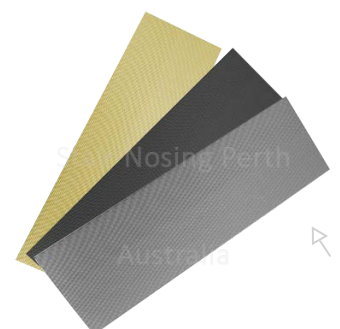

310 Santoprene Rubber

