

# Stair Nosing Australia

email: [daphne@stairnosingaustralia.com.au](mailto:daphne@stairnosingaustralia.com.au)



## Product Data Sheet-Epoxy inserts-strips - 510 series

The inserts all measure 54 mm. You can choose any stair nosing and choose from the large range of inserts to achieve the function, safety and look of the stair nosing you require.

This insert does not have a return on the front so can be recessed into substrates such as concrete and wood. AS1428 2009 standards state that the insert can be set back no more than 15 mm from the edge of the step.

1. Epoxy
2. Pinstripe
3. Aluminum ripple trim
4. Carborundum

CODE	<b>510</b>
BASE MATERIAL	Alloy: 6060, Temper: T5
FINISH	Clear Anodised - 25Um Black Anodised - 40Um Sovereign Gold
TREAD WIDTH	<b>54mm</b>
TREAD THICKNESS	<b>2.6mm</b>

### INSERT TYPE

- Epoxy
- 4 Bar Black
- 4 Bar Solid Black
- 4 Bar Sovereign Gold
- 4 Bar Grey
- 4 Bar Solid Grey - 4 Bar Sovereign Gold


INSERT SLIP RATING P 5 (As per Stair Nosing Perth's standard warranty conditions)  
PRODUCT WARRANTY P4 classification for PVC and P5 classification (Highest available)

CODE COMPLIANCE AS1428.4.1-2009  
Check floor finish colour for luminance contrast requirements

FIXING METHOD Fix with adhesive

### TYPICAL INSTALLATION

Fix with adhesive

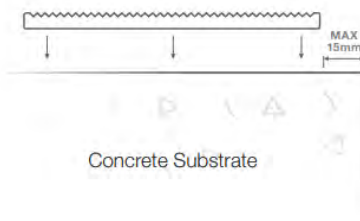

4 Bar solid black



4 Bar solid grey



4 Bar black



### PROFILE



A	55mm
B	2.6mm

4 Bar solid grey



4 Bar solid black



4 Bar sovereign gold



4 Bar black

