

PRODUCT DATA SHEET 13 SERIES

web: [https:// stairnosingaustralia.com.au](https://stairnosingaustralia.com.au)

Contact : Daphne 0422 803 365

**email:
daphne@stairnosingaustralia.com.au**


STAIRNOSING13 SERIES

Architects and builders choose to have a stair nosing that sits flush to the steps. This means that the nosing must be able to sit in a recess and the stair nosing will sit in the step creating a flush -level finish .


This stair nosing has a 10 mm face or riser,once again it would be wise to ensure the steps are level.

CODE	13 SERIES
BASE MATERIAL	Alloy: 6060, Temper: T5
FINISH	Clear Anodised – 25Um
TREAD WIDTH	58mm
FRONT DEPTH	10mm
TREAD THICKNESS	4.8mm
INSERT TYPE	Carborundum - Epoxy -Ripple trim - Santoprene PVC-
PRODUCT WARRANTY	(As per Stair Nosing Perth's standard warranty conditions)
INSERT SLIP RATING	P4 classification for PVC and P5 classification
CODE COMPLIANCE	AS1428.8 2021 compliant Check floor finish colour for luminance contrast requirements
FIXING METHOD	Adhesive or screw fixing
APPLICATION	Rebated-recessed into wood concrete.


TYPICAL INSTALLATION

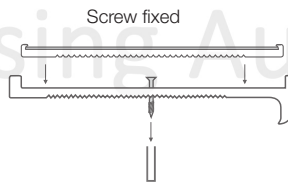

Timber Substrate

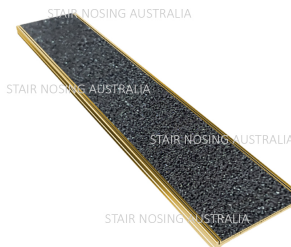

413 RECESSED STAIR NOSING

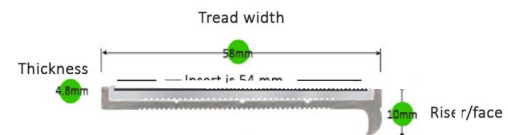

EXAMPLES OF INSERTS

