

PRODUCT DATA SHEET 15 SERIES





web: <https://stairnosingaustralia.com.au/>

Contact : Daphne 0422 803 365


email: daphne@stairnosingaustralia.com.au

STAIRNOSING 15 series-stair nosing is suitable for all surfaces

With a very wide tread this provides maximum stability on steps edges. Often steps require a wider tread because they are chipped or cracked, or even bull nosed. Older sets of stairs may have a grooved tile or the concrete may be grooved on the step edge. Any remedial repairs require a nosing that will cover the width of those grooves. This product with its wide tread is designed to do that. Suitable for bricks, paver's, all outdoor steps-stairs

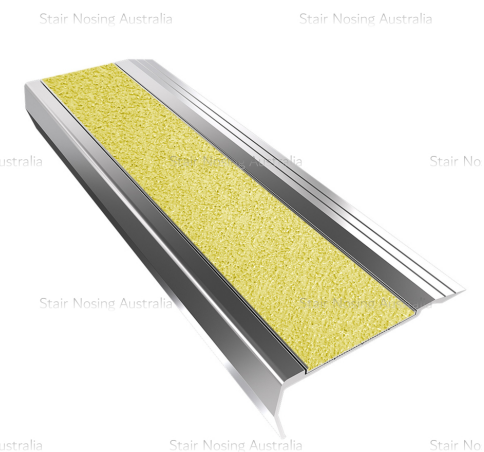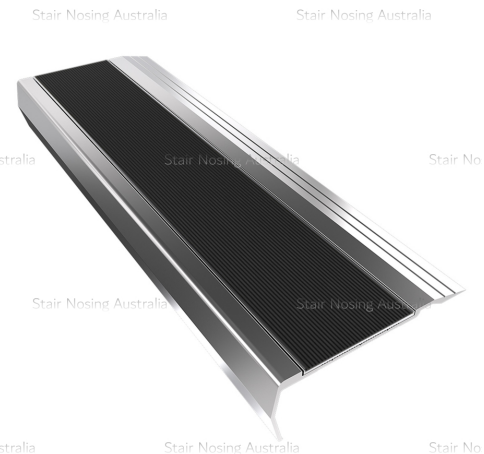

PRODUCT	15 series
	Alloy: 6060, Temper: T5
FINISH	Clear Anodised – 25Um/Anodised Black/Anodised Sovereign Gold
TREAD WIDTH	98 mm
FRONT DEPTH	35 mm
TREAD THICKNESS	4.8mm
INSERT TYPE	Carborundum - Epoxy - Santoprene-Aluminium ripple trim
PRODUCT WARRANTY	2 Years (As per Stair Nosing Perth's standard warranty conditions)
INSERT SLIP RATING	P4 classification for PVC and P5 classification (Highest available)
CODE COMPLIANCE	AS1428.1-2009 Check floor finish colour for luminance contrast requirements LRV values
FIXING METHOD	Screw fixed/or adhesive
APPLICATION	Surface mounted on hard floor finishes – Concrete [if level] , Timber, porcelain, ceramics, terrazzo, bricks, paver's.



715 Anodised ripple trim


Inserts for 15 series



415 Carborundum



115 Epoxy carbide



315 Santoprene Rubber