

PRODUCT DATA SHEET 19 SERIES




web: <https://stairnosingaustralia.com.au>

Contact : Daphne 0422 803 365

email: daphne@stairnosingaustralia.com.au

STAIRNOSING 19 series-stair nosing is suitable for all hard surfaces


With a very wide tread this provides maximum stability on steps edges. Often steps require a very large tread. Generally this is because the steps may be chipped, or cracked. The face of the riser of the step is 16 mm.

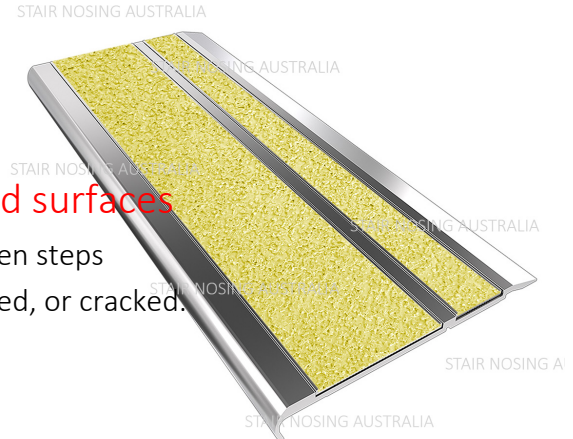


SPECIFICATIONS

PRODUCT	19 series
BASE MATERIAL	Alloy: 6060, Temper: T5
FINISH	Clear Anodised – 25Um
TREAD WIDTH	120mm
FRONT THICKNESS	16mm FROM TOP OF TREAD 10 mm riser
TREAD THICKNESS	6mm
INSERT TYPE	Carborundum– Heavy Duty,
PRODUCT WARRANTY	2 Years (As per Stair Nosing Perth's standard warranty conditions)
INSERT SLIP RATING	P5 Classification (Highest available) External
CODE COMPLIANCE	AS1428.-2021Check floor finish colour for luminance contrast requirements - Solid band of colour-minium of 50 mm strip
FIXING METHOD	Screw fixed and adhesive
APPLICATION	Surface mounted on hard floor finishes – Concrete, Timber etc.

TYPICAL INSTALLATION Screw fixed

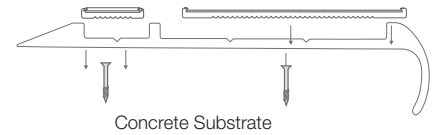

PROFILE

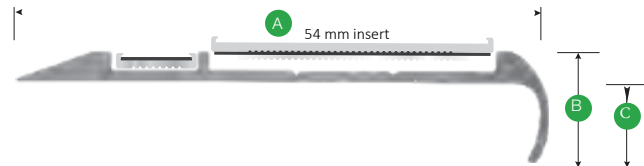

A	120mm
B	6 mm thickness
C	10mm face

