

PRODUCT DATA SHEET CERAMIC PLAIN TILE HAZARD

web: [https:// stairnosingaustralia.com.au](https://stairnosingaustralia.com.au)

Contact : Daphne 0422 803 36


email: daphne@stairnosingaustralia.com.au

CERAMIC PLAIN TILE - HAZARD


Tactiles series are designed to be installed onto pedestrian surfaces to assist in the orientation of people who are vision impaired and to give tactile warning to safely navigate around in a built environment - detectable underfoot or by cane.

SPECIFICATIONS

PRODUCT	Ceramic Plain Tile Hazard
CODE	NCTH
MATERIAL	Ceramic
TOP PROFILE	Concentric rings, plain sides
OVERALL DIMENSIONS	300 x 300mm
PLATE THICKNESS	8mm
PRODUCT WARRANTY	3 years (As per Standard Warranty)
SLIP RATING	V Rating
CODE COMPLIANCE	AS/NZS1428.4.1:2009, BCA 2014 (Subject to surrounding floor finish luminance)
FIXING METHOD	Adhesive or Mechanical

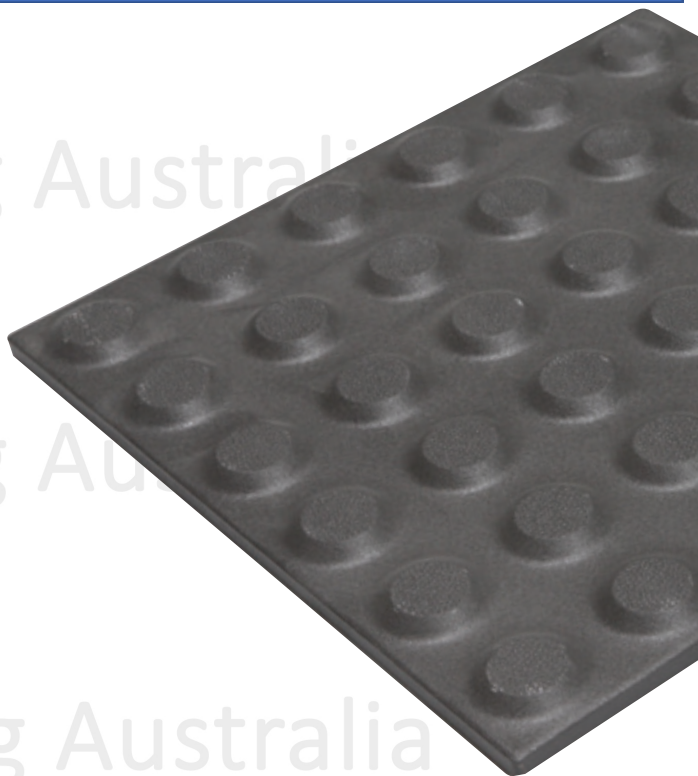

PROFILE



A	300mm
B	8mm

* Length is 300mm

Hazard- Required Contrast-30%

LRV [Light Reflective Values]
Luminance Contrast, values must be tested against adjacent surfaces for compliance with Australian Standards

STANDARD COLOURS



CHARCOAL NCTH4015

Dry: 8.05
Wet: 5.76



GREY NCTH4016

Dry: 33.43
Wet: 32.56



MUSTARD NCTH4017



WHITE NCTH4018

Dry: 86.7
Wet: 87

TYPICAL INSTALLATION

Fix with adhesive or mechanical

