

PRODUCT DATA SHEET FIBRE TACTILE HAZARD

web: <https://stairnosingaustralia.com.au>

Contact : Daphne 0422 803 36

email: daphne@stairnosingaustralia.com.au

FIBRE TACTILE HAZARD


FibrePlate is a new range of surface mounted TGSi which provides the market with an additional option for retro fitting.

FibrePlate is formed from ultra UV stabilised resin and is reinforced with embedded fibreglass. The final product is an ultra-strong material that is mechanically fixed and eliminates many of the issues with flexible adhesive fixed poly tiles.

SPECIFICATIONS

PRODUCT	Fibre Tactile Hazard
CODE	NFTH
MATERIAL	Ultra UV stabilised resin, reinforced with embedded fibreglass.
TOP PROFILE	Concentric broken rings, plain sides
OVERALL DIMENSIONS	600 x 300 x 2mm
PLATE THICKNESS	2.0mm with bevelled edges
PRODUCT WARRANTY	3 years (As per Standard Warranty)
SLIP RATING	AS4586 Appendix A Slip Test: P5 AS4586 Appendix D Slip Test: R12
CODE COMPLIANCE	AS/NZS1428.4.1:2009, BCA 2014 (Subject to surrounding floor finish luminance)
FIXING METHOD	Heavy duty external grade butyl tape with reinforcement mesh and mechanical fixing

STANDARD COLOURS



BLACK NFTH1001



YELLOW NFTH1002




WHITE NFTH1004



BLUE NFTH1005

PROFILE




A 300mm

B 2.0mm

* Length is 600mm

TYPICAL INSTALLATION

Fix with adhesive and mechanical

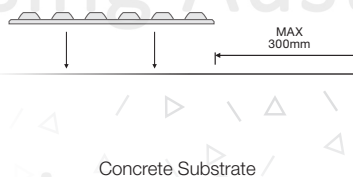

Required Contrast-30%

LRV [Light Reflective Values]
Luminance Contrast, values must be tested against adjacent surfaces for compliance with Australian Standards

